

**INTEGRADA**

# MOTOR/CONJUNTO PARA PERSIANA 35/45 Kg - MTI

**COMPOSIÇÃO:**


Motor elétrico  
Mancal com rolamento  
Ponteiras e adaptador  
Botoneira c/ espelho ou controle conforme modelo

**INFORMAÇÕES**


Motor cor preto  
120 V ou 230 V

**EMBALAGEM:**

Pack 01 pç

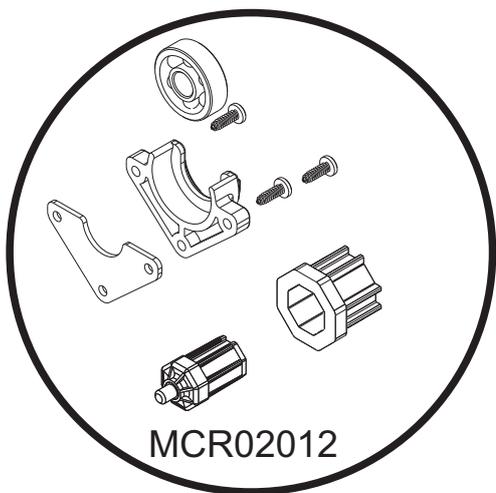

**MCR02012**

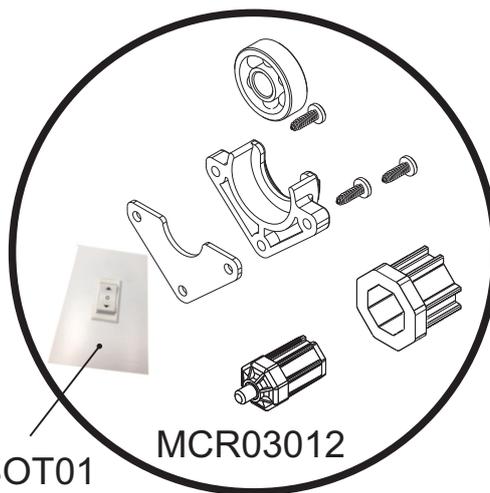

**BOT01**

Espelho com botoneira acompanha o motor

**MCR03012**



**CMR-01L**  
Controle Remoto conforme modelo



\* Chave de regulagem, controle remoto e MCR'S acompanham o motor.  
Códigos individuais serão comercializados somente em caso de reposição:  
MCR02, MCR03, CMR-01L, BOT01

CÓD.NOVO	DESCRIÇÃO	CÓD.ANTIGO
MTI014	MOTOR P/ PERSIANA 35 Kg 220V\REG MECAN S/ BOT	MTI06L
MTI015	MOTOR P/ PERSIANA 35 Kg 110V\REG MECAN S/ BOT	MTI07L
MTI016	MOTOR P/ PERSIANA 35 Kg 110V\REG MECAN C/ CONTROLE	MTI08L
MTI017	MOTOR P/ PERSIANA 35 Kg 220V\REG MECAN C/ CONTROLE	MTI09L
MTI018	MOTOR P/ PERSIANA 45 Kg 220V\REG MECAN C/ CONTROLE	MTI10L
MTI019	MOTOR P/ PERSIANA 45 Kg 220V\REG MECAN S/ BOT	MTI11L
MTI020	MOTOR P/ PERSIANA 45 Kg 110V\REG MECAN S/ BOT	MTI12L
MTI021	MOTOR P/ PERSIANA 45 Kg 100V\REG MECAN C/ CONTROLE	MTI13L
MTI022	CONJ. MOTOR P/PERSIANA 35Kg 220V\REG MECAN C/BOT	MTI33220B
MTI023	CONJ. MOTOR P/ PERSIANA 35Kg 110V\REG MECAN C/ BOT	MTI33110B
MTI024	CONJ. MOTOR P/ PERSIANA 35Kg 110V\REG MECAN C/CONTR	MTI33110C
MTI025	CONJ. MOTOR P/ PERSIANA 35Kg 220V\REG MECAN C/CONTR	MTI33220C
MTI026	CONJ. MOTOR P/ PERSIANA 45Kg 220V\REG MECAN C/CONTR	MTI45220C
MTI027	CONJ. MOTOR P/ PERSIANA 45Kg 220V\REG MECAN C/ BOT	MTI45220B
MTI028	CONJ. MOTOR P/ PERSIANA 45Kg 110V\REG MECAN C/ BOT	MTI45110B
MTI029	CONJ. MOTOR P/ PERSIANA 45Kg 110V\REG MECAN C/CONTR	MTI45110C

# Product Preview

## NR0-Rn PA Motor Kit

DATE

SIGNATURE

APPROVED BY CUSTOMER


### Ø35-Tubular Motors Radio PA

REFERENCE	PRODUCT DESCRIPTION	TORQUE(Nm)	SPEED (rpm)	VOLTAGE	POWER (W)	CURRENT (A)	RUNNING TIME (min)	PROTECTION DEGREE	LIMIT REVOLUTIO N (turns)	MOTOR LENGTH (mm)
2811793	NR0/10-16-Rn PA	10	16	230V~50Hz	150	0.65	4	IP44	40	671
2811794	NR0/10-18-Rn PA	10	18	120V~60Hz	150	1.20	1min on - 3min off -4 cycles	IP44	40	671


### Motor Package Configuration



### Motor Information

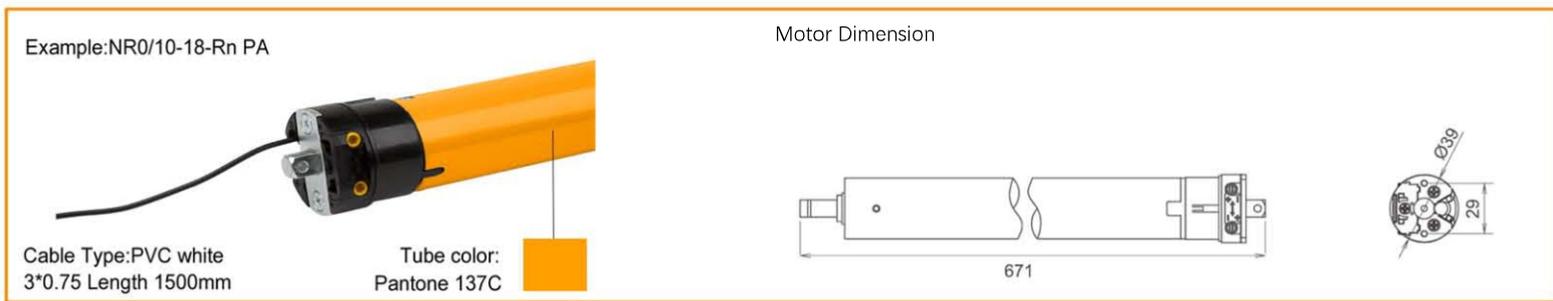

### Packaging Information

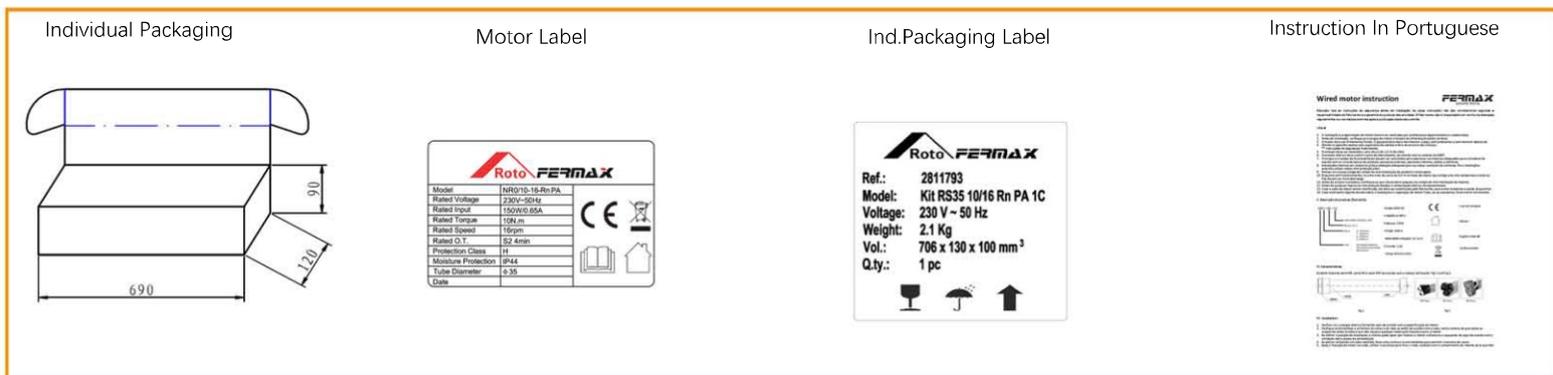

# Product Preview

## NR0 Motor Kit

DATE

SIGNATURE

APPROVED BY CUSTOMER

### Ø35-Tubular Motors Wired

REFERENCE	PRODUCT DESCRIPTION	TORQUE(Nm)	SPEED (rpm)	VOLTAGE	POWER (W)	CURRENT (A)	RUNNING TIME (min)	PROTECTION DEGREE	LIMIT REVOLUTIO N (turns)	MOTOR LENGTH (mm)
2811546	NR0/10-18	10	18	120V~60Hz	150	1.20	1min on - 3min off - 4cycle	IP44	40	551
2811545	NR0/10-16	10	16	230V~50Hz	150	0.65	4	IP44	40	551

### Motor Package Configuration



Wheel :2810170 Crown :2810292 Wheel :2810622 Crown :2810313 End limit adjusting tool: 5021158 Square Bracket :2810993 Support Bracket : 2810201

### Motor Information


Example:NR0/10-18



Cable Type:PVC white  
3\*0.75 Length 1500mm


Tube color: COR BLACK  
Pantone 137C

Motor Dimension

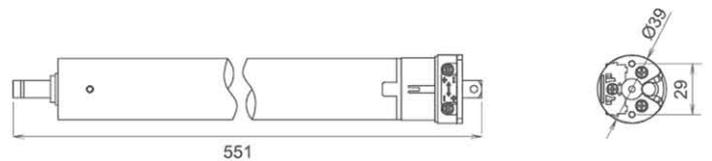


### Packaging Information


Individual Packaging




Medium Packaging




Motor Label



Med.Packaging Label



Ind.Packaging Label



Instruction In Portuguese



DATE

SIGNATURE

APPROVED BY CUSTOMER

# Product Preview

## NR1-Rn PA Motor Kit


### Ø45-Tubular Motors Radio PA

REFERENCE	PRODUCT DESCRIPTION	TORQUE(Nm)	SPEED (rpm)	VOLTAGE	POWER (W)	CURRENT (A)	RUNNING TIME (min)	PROTECTION DEGREE	LIMIT REVOLUTIO N (turns)	MOTOR LENGTH (mm)
2811795	NR1/15-16-Rn PA	15	16	230V~50Hz	150	0.70	3	IP44	30	635
2811796	NR1/15-18-Rn PA	15	18	120V~60Hz	150	1.30	3	IP44	30	635

### Motor Package Configuration




Wheel :2810622 Crown :2810623




Setting Tool: 5021158



Remote: 2812236



Square Bracket :2810230



Support Bracket : 2810201

### Motor Information

Example:NR1/15-18-Rn PA




Cable Type:PVC white  
3\*0.75 Length 1500mm

Tube color:  
Pantone 137C


COR  
BLACK

Motor Dimension

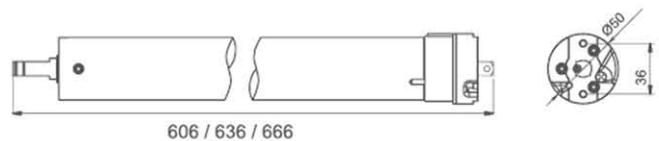


### Packaging Information


Individual Packaging



Motor Label



Ind.Packaging Label



Instruction In Portuguese





# Product Preview

## NR1 Motor Kit

DATE

SIGNATURE

APPROVED BY CUSTOMER

### Ø45-Tubular Motors Wired

BPI REFERENCE	PRODUCT DESCRIPTION	TORQUE(Nm)	SPEED (rpm)	VOLTAGE	POWER (W)	CURRENT (A)	RUNNING TIME (min)	PROTECTION DEGREE	LIMIT REVOLUTIO N (turns)	MOTOR LENGTH (mm)
2811543	NR1/15-16	15	16	230V~50Hz	150	0.70	4	IP44	30	580
2811544	NR1/15-18	15	18	120V~60Hz	150	0.70	4	IP44	30	580
2811972	NR1/15-18	15	18	220V/60Hz	150	0.70	4	IP44	30	580


### Motor Package Configuration




Wheel :2810622 Crown :2810623



End limit adjusting tool: 5021158



Square Bracket :2810230



Support Bracket : 2810201

### Motor Information


Example:NR1/15-16



Cable Type:PVC white  
4\*0.75 Length 1500mm


Tube color: **COR BLACK**  
Pantone 137C

Motor Dimension

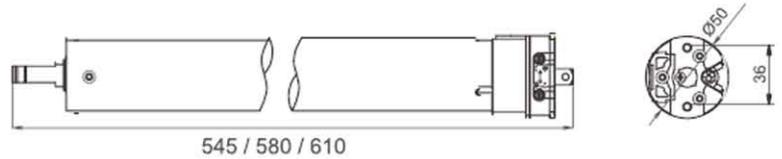


### Packaging Information


Individual Packaging




Medium Packaging



Motor Label



Med.Packaging Label



Ind.Packaging Label



Instruction In Portuguese

